

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

95-332

First Named Inventor or
Application Identifier:

CHOW

Title: Apparatus and Method in a Network Switch for Synchronizing Transfer of a Control Tag to a Switch Fabric with Transfer of Frame Data to a Buffer Memory

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 10]
3. ☒ Formal Drawing(s) (35 USC 113) [Total Sheets: 4]
4. ☒ Oath or Declaration [Total Pages: 2]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
10. ☐ English Translation Document (if applicable)
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
14. ☐ Small Entity Statement(s) ☐ Statement filed in prior application, status still proper and desired.
15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: ____ / ____

18. CORRESPONDENCE ADDRESS

Leon R. Turkevich
Farkas & Manelli, PLLC
2000 M Street, N.W., 7th Floor
Washington, D.C. 20036-3307
CUSTOMER NO.: 20736


Name (Type)

Leon R. Turkevich

Registration No.
(Att./Agent)

34,035

Signature



Date

August 14, 2000

08/14/00
1c685 U.S. PTO

09/637016
08/14/00

1c612 U.S. PTO
09/637016
08/14/00

E0930 / 95-332

APPARATUS AND METHOD IN A NETWORK SWITCH
FOR SYNCHRONIZING TRANSFER OF A CONTROL
TAG TO A SWITCH FABRIC WITH TRANSFER OF
FRAME DATA TO A BUFFER MEMORY

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to layer 2 (and above) switching of data packets in a non-blocking network switch configured for switching data packets between subnetworks and more particularly to synchronizing transfer of a data frame to a buffer memory with the transfer of a frame tag result to a switch fabric.

BACKGROUND ART

Local area networks use a network cable or other media to link stations on the network. Each local area network architecture uses a media access control (MAC) enabling network interface devices at each network node to access the network medium.

The Ethernet protocol IEEE 802.3 has evolved to specify a half-duplex media access mechanism and a full-duplex media access mechanism for transmission of data packets. The full-duplex media access mechanism provides a two-way, point-to-point communication link between two network elements, for example between a network node and a switched hub.

Switched local area networks are encountering increasing demands for higher speed connectivity, more flexible switching performance, and the ability to accommodate more complex network architectures. For example, commonly-assigned U.S. Patent No. 5,953,335 discloses a network switch configured for switching layer 2 type Ethernet (IEEE 802.3) data packets between different network nodes; a received data packet may include a VLAN (virtual LAN) tagged frame according to IEEE 802.1q protocol that specifies another subnetwork (via a router) or a prescribed group of stations. Since the switching occurs at the layer 2 level, a router is typically necessary to transfer the data packet between subnetworks.

Efforts to enhance the switching performance of a network switch to include layer 3 (e.g., Internet protocol) processing may suffer serious drawbacks, as current layer 2 switches preferably are configured for operating in a non-blocking mode, where data packets can be output from the switch at

the same rate that the data packets are received. Newer designs are needed to ensure that higher speed switches can provide both layer 2 and above switching capabilities for faster speed networks such as 100 Mbps or gigabit networks.

However, such design requirements risk loss of the non-blocking features of the network switch, as it becomes increasingly difficult for the switching fabric of a network switch to be able to perform layer 3 processing at the wire rates (i.e., the network data rate).

Conventionally, a switch fabric of a network switch snoops on the write bus to obtain data needed for making frame forwarding decisions. Typically, when a first packet is received by a switch port, the packet is transferred to an external buffer memory. During the time the first packet is sent to the external memory, a second packet can be received by the switch port and tagged. The switch fabric will try to send the packet out, but the switch fabric may inappropriately correspond the tag associated with the second packet, with the first packet.

SUMMARY OF THE INVENTION

There is a need for an arrangement that enables a network switch to provide layer 2 switching and layer 3 switching capabilities for 100 Mbps and gigabit links without blocking of the data packets.

There is also a need for an arrangement in a network switch that synchronizes transfer of a frame tag to a switch fabric with the transfer of frame data to a buffer memory.

These and other needs are attained by the present invention, where a network switch port includes a port filter configured to receive at least a portion of a data frame including layer 3 information and to generate a tag result. A queue block is configured for transferring the data frame to a buffer memory. A switch fabric is configured for receiving the tag result and for performing a frame forwarding switching decision based on the tag result and monitoring of the transfer of the data frame. A synchronizing device is configured to synchronize the transfer of a valid tag result to the switch fabric with transfer of the at least a portion of the data frame to the buffer memory based on a signal from the queue indicating a status of the transfer of the portion of the data frame to the buffer memory.

Another aspect of the invention provides a method of synchronizing transfer of frame tags to a switch fabric with the transfer of data frames to a buffer memory. The method includes receiving, at a network switch, at least a portion of a data frame including layer 3 information. A tag result is generated which corresponds to at least a portion of the data frame. Transfer of the tag result to a switch fabric is synchronized with the transfer of at least a portion of the data frame to a buffer memory based on a signal indicating a status of the transfer of the portion of the data frame to the buffer memory.

Thus, the invention provides synchronized transfer of frame tags to a switch fabric the transfer of the frame data to a buffer memory.

Additional advantages and novel features of the invention will be set forth in part in the description which follows and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The advantages of the present invention may be realized and attained by means of instrumentalities and combinations particularly pointed in the appended claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Reference is made to the attached drawings, wherein elements having the same reference numeral designations represent like element elements throughout and wherein:

Figure 1 is a block diagram of a packet switched network including multiple network switches for switching data packets between respective subnetworks according to an embodiment of the present invention.

Figure 2 is a diagram illustrating a conventional layer 2 Ethernet-type data packet carrying a layer three Internet Protocol (IP) packet.

Figure 3 is a block diagram illustrating the network switch of Figure 1 in further detail.

Figure 4 is an illustration of a waveform of the tag generation block of the invention.

Figure 5 is a flow diagram of the state machine of the tag generation block of the invention.

BEST MODE FOR CARRYING OUT THE INVENTION

Figure 1 is a block diagram illustrating a packet switched network 10, such as an Ethernet (IEEE 802.3) network. The packet switched network includes integrated (i.e., single chip) multiport switches 12 that enable communication of data packets between network stations 14. Each network station 14, for example a client workstation, is typically configured for sending and receiving data packets at 10 Mbps or 100 Mbps according to IEEE 802.3 protocol. Each of the integrated multiport switches 12 are interconnected by gigabit Ethernet links 16, enabling transfer of data packets between subnetworks 18a, 18b, and 18c. Hence, each subnetwork includes a switch 12, and an associated group of network stations 14.

Each switch 12 includes a switch port 20 that includes a media access control (MAC) module 22 and a packet classifier module 24. The MAC module 20 transmits and receives data packets to the associated network stations 14 across 10/100 Mbps physical layer (PHY) transceivers (not shown) according to IEEE 802.3u protocol. Each switch 12 also includes a switch fabric 25, also referred to as an internal rules checker (IRC), configured for making frame forwarding decisions for received data

packets. In particular, the switch fabric 25 is configured for layer 2 switching decisions based on source address, destination address, and VLAN information within the Ethernet (IEEE 802.3) header; the switch fabric 25 is also configured for selective layer 3 switching decisions based on evaluation of an IP data packet within the Ethernet packet.

5 As shown in Figure 1, each switch 12 has an associated host CPU 26 and a buffer memory 28, for example an SSRAM. The host CPU 26 controls the overall operations of the corresponding switch 12, including programming of the switch fabric 25. The buffer memory 28 is used by the corresponding switch 12 to store data frames while the switch fabric 25 is processing forwarding decisions for the received data packets. Hence, each network switching system includes a integrated switch, 12, a host
10 CPU 26, and a buffer memory 28.

As described above, the switch fabric 25 is configured for performing layer 2 switching decisions and layer 3 switching decisions. The availability of layer 3 switching decisions may be particularly effective if an end station 14 within subnetwork 18a wishes to send an e-mail message to selected network stations in subnetwork 18b, 18c, or both; if only layer 2 switching decisions were
15 available, the switch fabric 25 of switch 12a would need to send the e-mail message to a router (not shown), which would introduce additional delay. Use of layer 3 switching decisions by the switch fabric 25 enables the switch fabric 25 to make intelligent decisions as far as how to handle a packet, including advanced forwarding decisions, and whether a packet should be considered a high-priority packet for latency-sensitive applications, such as video or voice.

20 Figure 2 is a diagram illustrating an Ethernet (IEEE 802.3) packet 30 carrying an IP packet 32 as payload data. Specifically, the Ethernet packet 30 includes a start frame delimiter (SFD) 34, an Ethernet header 36, a layer 2 checksum 38 and the IP packet 32. The IP packet 32 includes an IP header 35, an IP checksum field 37, and payload data 39. Hence, a switch fabric 25 configured for layer 3 switching decisions needs to be able to quickly process the IP packet 32 within the received Ethernet frame 30 to
25 avoid blocking of the frame within the switch.

According to the disclosed embodiment, the packet classifier module 24, also referred to as a network switch port filter, is configured for identifying (i.e., evaluating) the incoming data packet at the network switch port 20, and supplying to the switch fabric 25 a tag that specifies the action to be performed on the data packet based on type of data packet being received. Specifically, the packet
30 classifier module 24 simultaneously compares the incoming data packet with a plurality of templates configured for identifying respective data formats. The packet classifier module 24, based on the comparison between the incoming data packet and the plurality of templates, identifies an equation to be executed that specifies the tag to be supplied to the switch fabric 25. Specifically, users of the host processor 26 will specify policies that define how data packets having certain IP protocols should be

handled by the switch fabric 25. These policies are implemented by loading into the switch fabric 25 a set of frame forwarding decisions for each corresponding IP protocol type. Hence, the switch fabric 25 could include one set of frame forwarding instructions for an HTTP packet, another set of frame forwarding instructions for an SNMP packet, and another set of frame forwarding instructions for a high-priority packet (e.g., video, or voice, etc.).

With reference to Figure 3, the network switch 12 includes a MAC module 22 including a transmit MAC portion 23 and a receive MAC portion 25, a receive FIFO buffer 27, a queue block 29, the switch fabric 25, an output queue 42, a dequeue block 44, and a transmit FIFO buffer 46. The queue block 29 and the dequeue block 44 are configured to transfer layer 2 information to and from the external buffer memory 28. The external buffer memory 28 receives data from the queue block 29 via a write bus 31 and the switch fabric 25 snoops on the write bus 21.

The network switch port 20 also includes a port filter 40 that includes a frame identifier 41. The port filter 40 is configured for performing various layer 3 and above classification, for example identifying whether the incoming data packet includes a layer 3 IP datagram. The frame identifier 41 is configured for identifying the beginning of the IP frame, and locating the layer 3 address entries as the IP frame is received from the network. In particular, the frame identifier identifies the start position of the IP source address, IP destination address, TCP/UDP source port, and TCP/UDP destination port as the data is being received.

In accordance with the disclosed embodiment, the port filter 40 outputs a CORE_ACTGEN_FIRST_VALID signal 52 indicating that a first result is valid for receipt by a synchronization device (ACTGEN) 50. The first result relates to a portion of the data frame such as the first 64 bytes of data. The ACTGEN 50 receives the first result of equation evaluation via the 64 bit CORE_ACTION_RESULT bus 61. The CORE_ACTGEN_FIRST_VALID signal 52 is shown in Figure 3 and in the waveform of Figure 4. In response to the signal 52, a FIRST_RESULTS_READY signal 54 is generated in the ACTGEN 50 which preserves the pulse signal 52 for additional time. The ACTGEN 50 receives a start of frame signal (MP_MS_RB_STAT [0]) 56 from the queue block 29 as the queue block 29 begins to transfer frame data to the external buffer memory 28 via the write bus 31.

An ACTGEN_PFTAG_FIRST signal 58 is generated in response to the signal 52 and the start of frame signal 56. It is noted that in the embodiment of Figure 4, the CORE_ACTGEN_FIRST_VALID signal 52 occurs before the start of frame signal 56. It can be appreciated that the ACTGEN_PFTAG_FIRST signal 58 can be generated even if the start of frame signal 56 occurs before the CORE_ACTGEN_FIRST_VALID signal 52. The ACTGEN_PFTAG_FIRST signal 58 also causes resetting of the FIRST_RESULTS_READY signal 54. The occurrence of the

ACTGEN_PFTAG_FIRST signal 58 indicates to the switch fabric 25 that the first tag result 62 (e.g. a tag result for the first 64 bytes) is ready for transfer (via ACTGEN_PFTAG_BUS 60) so as to be in sync with the transfer of frame data to the buffer memory 28. Thus, if the switch fabric needs data immediately, (e.g. within the first 64 bytes), there is no need to wait for the end of the frame before sending the first tag result 62 to the switch fabric 25.

Next, with reference to Figure 4, the port filter 40 outputs a CORE_ACTGEN_VALID signal 64 indicating that a final result is valid for receipt by the synchronization device (ACTGEN) 50. The final result relates to the entire data frame (including the first 64 bytes of data). In response to the signal 64, a FINAL_RESULTS_READY signal 66 is generated in the ACTGEN 50 which preserves the pulse signal 64. The ACTGEN 50 receives an end of frame signal (MP_MS_RB_STAT [1]) 68 from the queue block 29 as the end of frame data is received by the receive FIFO 27. An ACTGEN_PFTAG_FINAL signal 70 is generated in response to the signal 64 and end of frame signal 68. It is noted that in the embodiment of Figure 4, the CORE_ACTGEN_VALID signal 64 occurs before the end of frame signal 68. It can be appreciated that the ACTGEN_PFTAG_FINAL signal 70 can be generated even if the end of frame signal 68 occurs before the CORE_ACTGEN_VALID signal 64. The ACTGEN_PFTAG_FINAL signal 70 also causes resetting of the FINAL_RESULTS_READY signal 66. The occurrence of the ACTGEN_PFTAG_FINAL signal 70 indicates when a final tag result 72 (e.g. a tag result for the entire frame) is transferred to the switch fabric 25 so as to be in sync with the transfer of the end of frame data to the buffer memory 28.

As shown in Figure 3, the ACTGEN 50 includes memory 78 for temporarily storing the final tag result 72 and the first tag result 62 before they are sent to the switch fabric 25.

Figure 4 also shows a write address WR_ADDR 74 and a read address RD_ADDR 74 which are pointers for the final tag result 72 stored in the memory 78 (Figure 3) of the ACTGEN 50.

The ACTGEN 50 also includes a state machine 80 which is implemented to keep track of sending the ACTGEN_PFTAG_FIRST signal 58 and the ACTGEN_PFTAG_FINAL signal 70 to the switch fabric 25. A flow chart of the functions of the state machine 80 is shown in Figure 5. First, the state machine determines if a start of a frame is being received in step 90. If no frame is received, a reset function is initiated in step 92 and if a start of frame is detected, a start function is initiated in step 94. Step 96 determines if the CORE_ACTGEN_FIRST_VALID signal 52 or the FIRST_RESULTS_READY signal 54 is received by the ACTGEN 50. If one of these signals 52 or 54 detected, the ACTGEN_PFTAG_FIRST signal 58 is generated in step 98. A waiting period is defined in step 100 to wait for the end of the frame. Step 102 determines if the end of the frame 68 is detected and if so, another waiting period is provided in step 104. Step 106 determines if the

CORE_ACTGEN_VALID signal 64 or the FINAL_RESULT_READY signal 66 is received and if so, the ACTGEN_PFTAG_FINAL signal is generated in step 108.

Hence, the ACTGEN 50 provides transfer to the switch fabric of frame tags synchronized with the transfer of frame data to the buffer memory. More particularly, the tags are divided into a
5 first tag result and a final tag result which are sent to the switch fabric in sync with the start of frame data and end of frame data, respectively, to the buffer memory.

While this invention has been described with what is presently considered to be the most practical preferred embodiment, it is to be understood that the invention is not limited to the disclosed
10 embodiments, but, on the contrary, is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

What is Claimed is:

1. A method of synchronizing transfer of frame tags to a switch fabric with the transfer of data frames to a buffer memory, the method comprising:

receiving, at a network switch port, at least a portion of a data frame including layer 3 information,

generating a tag result corresponding to at least a portion of the data frame; and

synchronizing transfer of the tag result to a switch fabric with transfer of at least a portion of the data frame to a buffer memory based on a signal indicating a status of the transfer of the portion of the data frame to the buffer memory.

2. The method of claim 1, further comprising storing the portion of the data frame in the buffer memory.

3. The method of claim 2, wherein the step of generating a tag result includes generating a first tag result by the network switch port, and synchronizing transfer of the first tag result is based on a signal from the queuing device indicating a start of frame.

4. The method of claim 2, wherein the step of generating a tag result includes generating a final tag result by the network switch port, and synchronizing transfer of the final tag result is based on a signal from the queuing device indicating an end of frame.

5. The method of claim 4, further comprising storing the first and final tag result in memory prior to transfer to the switch fabric.

6. The method of claim 3, further comprising generating a preserving signal to preserve a signal indicating that the first tag result is valid, and to reset the preserving signal when the first tag result is transferred to the switch fabric.

7. The method of claim 4, further comprising generating a preserving signal in response to a determination that the final tag result is valid, and resetting the preserving signal when the final tag result is transferred to the switch fabric.

8. A network switch comprising:

a switch port having a port filter configured to receive at least a portion of a data frame including layer 3 information and to generate a tag result,

a queue block configured for transferring the data frame from the switch port to a buffer memory,

a switch fabric configured for receiving the tag result and for performing a frame forwarding switching decision based on the tag result and monitoring of the transfer of the data frame, and

a synchronizing device configured to synchronize the transfer of the tag result to the switch fabric with the transfer of the at least a portion of the data frame to the buffer memory based on a signal from the queue indicating a status of the transfer of the portion of the data frame to the buffer memory.

8. The network switch of claim 7, wherein the synchronizing device is configured to receive a first tag result and to transfer the first tag result to the switch fabric based on a start of frame signal from the queue block.

9. The network switch of claim 7, wherein the synchronizing device is configured to receive a final tag result and to transfer the final tag result to the switch fabric based on an end of frame signal from the queue block.

10. The network switch of claim 7, wherein the synchronizing device includes memory configured for storing the tag result.

11. The network switch of claim 7, wherein the synchronizing device is configured to generate a preserving signal to preserve a signal from the port filter indicating that the tag result is valid and to reset the preserving signal when the tag result is transferred to the switch fabric.


12. The network switch of claim 7, wherein the synchronizing device includes a state machine configured to control transferring the tag result to the switch fabric.


E0930 / 95-332

APPARATUS AND METHOD IN A NETWORK SWITCH
FOR SYNCHRONIZING TRANSFER OF A CONTROL
TAG TO A SWITCH FABRIC WITH TRANSFER OF
FRAME DATA TO A BUFFER MEMORY

ABSTRACT OF THE DISCLOSURE

A network switch port includes a port filter configured to receive at least a portion of a data frame including layer 3 information and to generate a tag result. A queue block is configured for transferring the data frame to a buffer memory. A switch fabric is configured for receiving the tag result and for performing a frame forwarding switching decision based on the tag result and monitoring of the transfer of the data frame. A synchronizing device is configured to synchronize the transfer of a valid tag result to the switch fabric with the transfer of the at least a portion of the data frame to the buffer memory based on a signal from the queue indicating a status of the transfer of the portion of the data frame to the buffer memory.



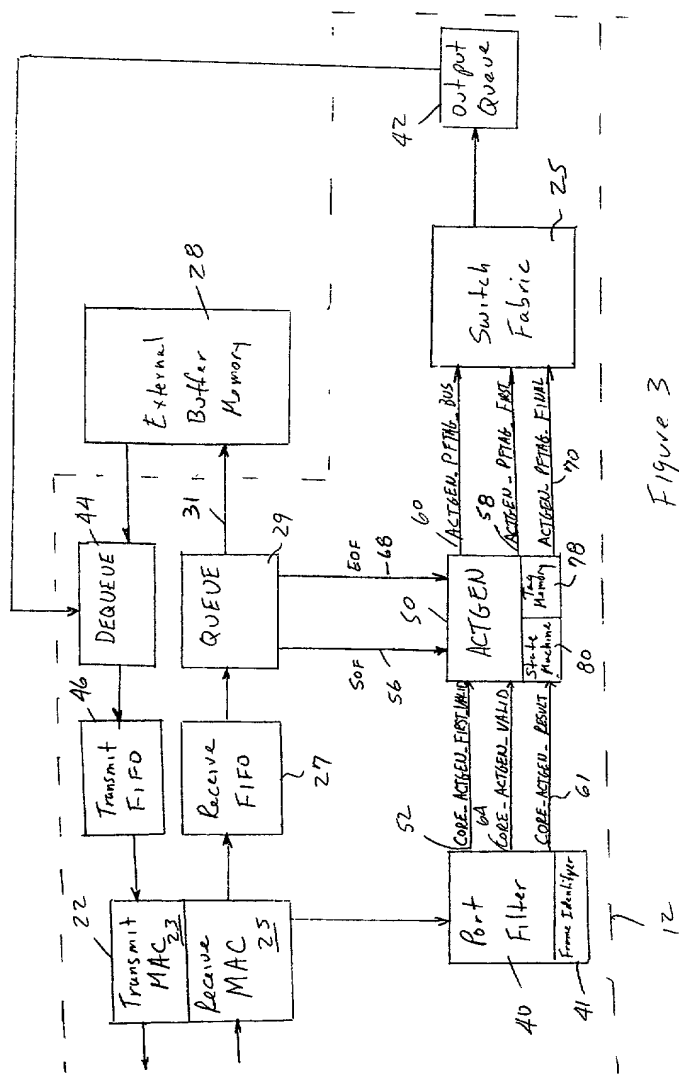

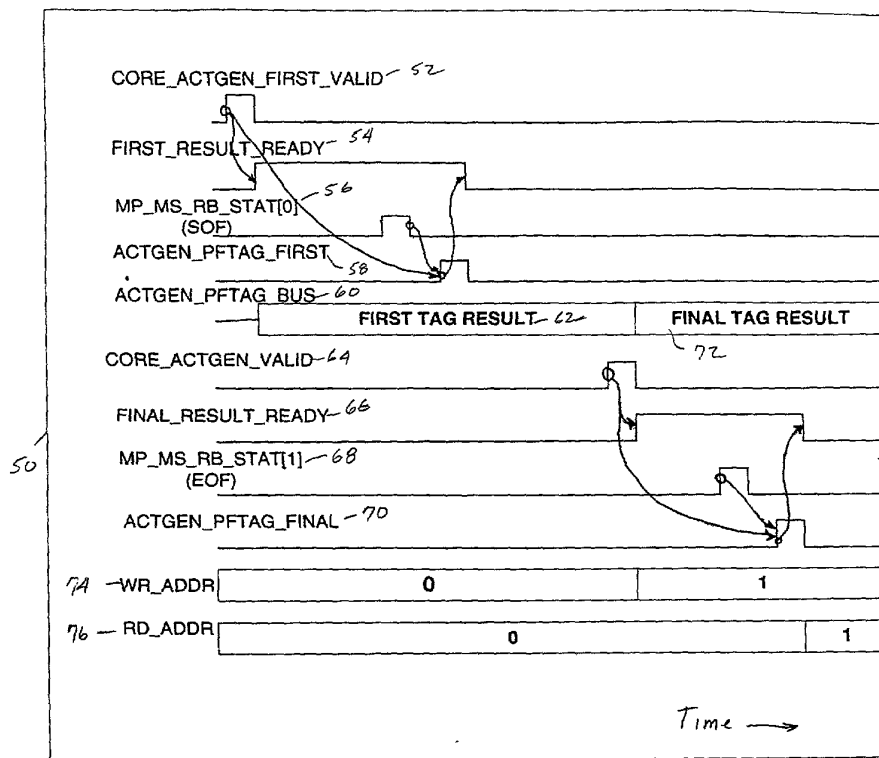


Figure 4

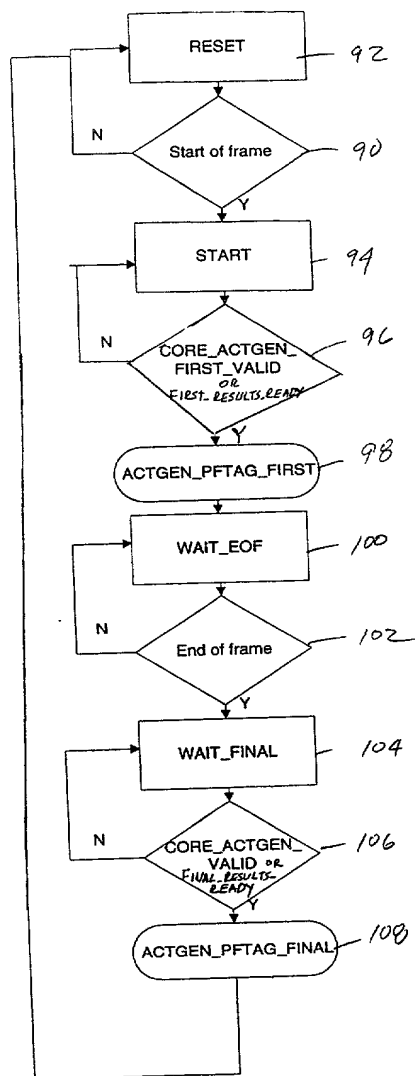


Figure 5

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter claimed and for which a patent is sought on the invention entitled **APPARATUS AND METHOD IN A NETWORK SWITCH FOR SYNCHRONIZING TRANSFER OF A CONTROL TAG TO A SWITCH FABRIC WITH TRANSFER OF FRAME DATA TO A BUFFER MEMORY**

[X] is attached hereto [] was filed on as Application Serial No. and was amended on (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is known to me to be material to patentability in accordance with Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign application(s) for patent or inventor's certificate, or Section 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Prior Foreign Application(s):</u>			<u>Priority Claimed</u>	
<u>Number</u>	<u>Country</u>	<u>Day/Month/Year filed</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under 35 USC §119(e) of any United States provisional application(s) listed below.

<u>Prior Provisional Application(s):</u>	
<u>Application Number</u>	<u>Filing Date</u>

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or Section 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

<u>Prior U. S. Application(s):</u>		
<u>Serial No.</u>	<u>Filing Date</u>	<u>Status: Patented, Pending, Abandoned</u>

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorney(s) and/or agent(s): Leon R. Turkevich, Reg. No. 34,035, and the attorneys of Customer No. 20736, all of:

FARKAS & MANELLI, PLLC
2000 M Street, N.W., 7th Floor
Washington, D.C. 20036-3307

and Richard J. Roddy, Reg. No. 27,688, William D. Zahrt II, Reg. No. 26,070, Paul S. Drake, Reg. No. 33,491, Louis A. Riley, Reg. No. 39,817; Elizabeth A. Apperley, Reg. No. 36,428; and Harry A. Wolin, Reg. No. 32,638, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and all future correspondence should be addressed to Customer No. 20736.

Full name of sole or first inventor: Peter Ka-Fai Chow

Inventor's signature: *Peter Ka-Fai Chow*

Date: 6/27/2000

Residence: 1416 Maxwell Lane, San Jose, CA 95131

Citizenship: USA

Post Office Address: same as above

Full name of second inventor: Somnath Viswanath

Inventor's signature: *Somnath Viswanath*

Date: 8/4/2000

Residence: 3538 Manda Drive, San Jose, CA 95124

Citizenship: USA

Post Office Address:
